

**GUJARAT TECHNOLOGICAL UNIVERSITY**  
**BE - SEMESTER-VI • EXAMINATION – WINTER • 2014**

**Subject Code: 160304**

**Date: 05-12-2014**

**Subject Name: Bio Medical Control Theory**

**Time: 02:30 pm - 05:00 pm**

**Total Marks: 70**


**Instructions:**

1. Attempt all questions.
2. Make suitable assumptions wherever necessary.
3. Figures to the right indicate full marks.


**Q.1 (a)** Find the inverse Laplace transform of  $F(s)$ , where **07**

$$F(s) = \frac{5(s + 2)}{s^2(s + 1)(s + 3)}$$


**(b)** Obtain the Laplace transform of function  $f(t)$  as shown in below figure. **07**

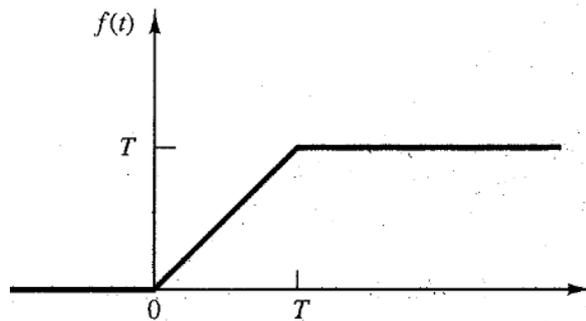

**Q.2 (a)** Obtain the transfer function  $Y(s)/X(s)$  of below given system. **07**

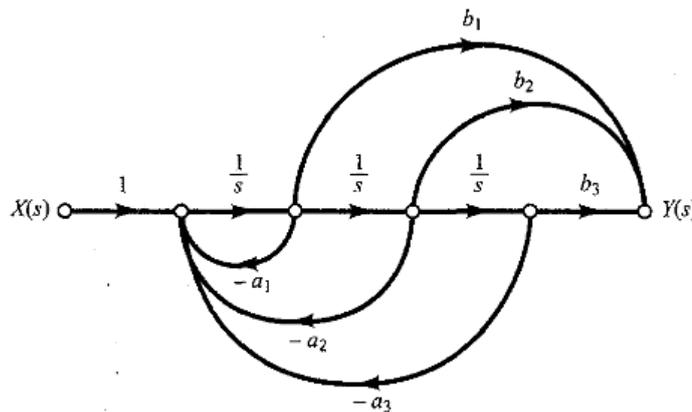


**(b)** Obtain the close-loop transfer function  $C(s)/R(s)$  of given block diagram by reduction technique. **07**

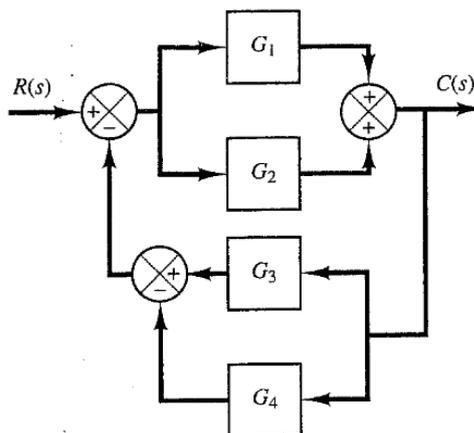


**OR**


**(b)** Obtain the close-loop transfer function  $C(s)/R(s)$  of given block diagram by **07**

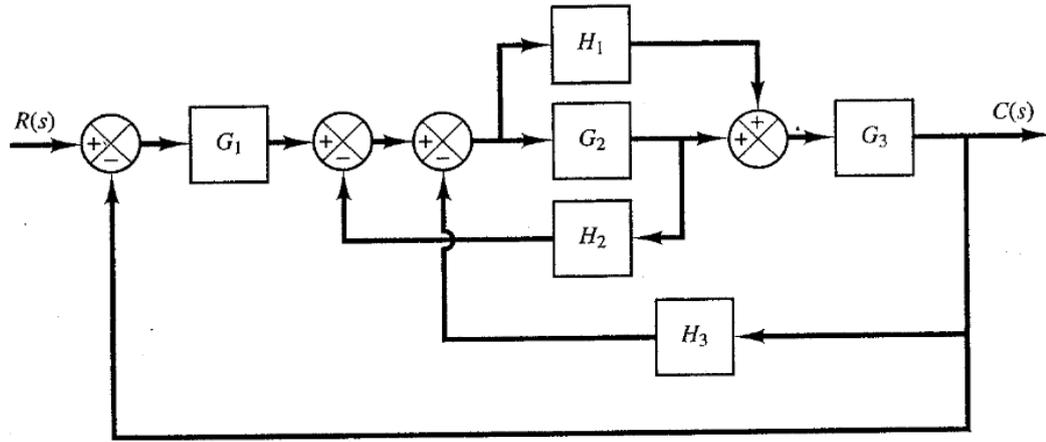

Q.3 (a) Draw a schematic diagram of an analogous mechanical system and derive the transfer function of below given electrical system. 07

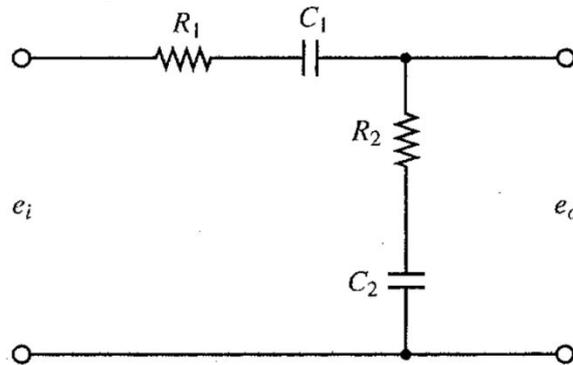


(b) If  $\zeta=0.6$  and  $\omega_n = 5$  rad/sec, then find the rise time  $t_r$ , peak time  $t_p$ , maximum overshoot  $M_p$ , and settling time  $t_s$ , when the system is subjected to a unit-step input. 07

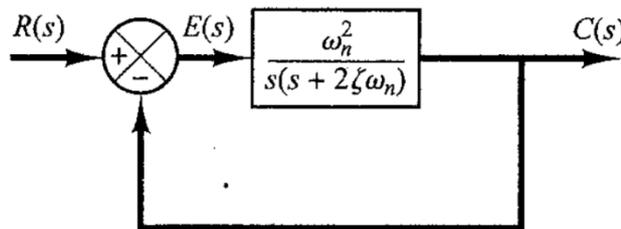


OR

Q.3 (a) Obtain the transfer function  $X_1(s)/U(s)$  and  $X_2(s)/U(s)$  of the mechanical system. 07

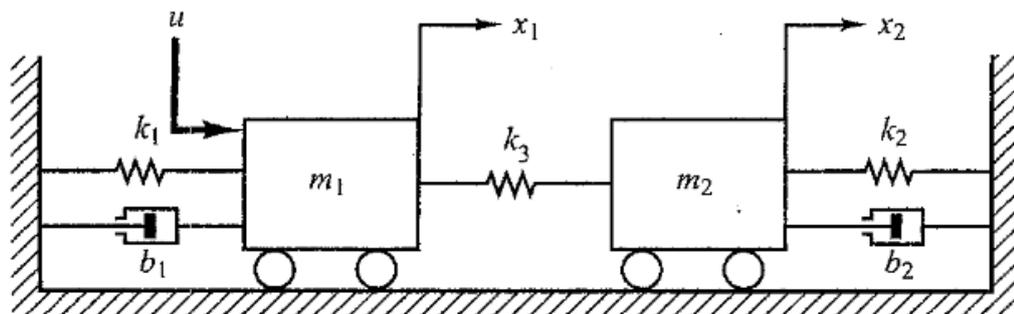

(b) For below given system, determine the values of gain  $K$  and velocity feedback constant  $K_h$ , so that the maximum overshoot in the unit-step response is 0.2 and the peak time is 1 sec. With these values of  $K$  and  $K_h$ , obtain the rise time and settling time. Assume that  $J = 1 \text{ kg-m}^2$  and  $B = 1 \frac{\text{N-m}}{\text{rad/sec}}$ . 07

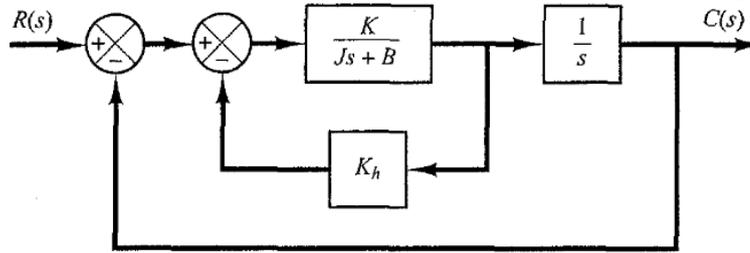

- Q.4 (a)** Plot root-loci of the unity-feedback control system with the following feed forward transfer function: **07**

$$G(s) = \frac{K}{s(s^2 + 4s + 5)}$$

Also determine closed-loop poles that have the damping ratio of 0.5. Find the gain value K at this point.


- (b)** Consider the unity-feedback control system with the following open-loop transfer function: **07**

$$G(s) = \frac{10}{s(s-1)(2s+3)}$$

Comment on stability of the system.

**OR**

- Q.4 (a)** Sketch the root loci for the below system. (The gain K is assumed to be positive.) **07**  
Observe that for small or large values of K the system is overdamped and for medium values of K it is underdamped.

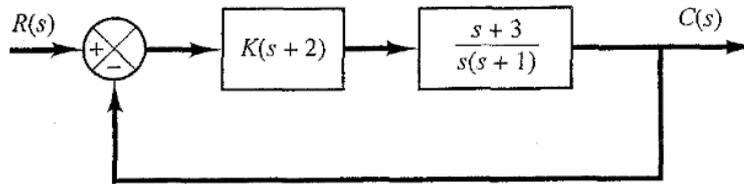

- (b)** Consider the characteristic equation **07**

$$s^4 + 2s^3 + (4+K)s^2 + 9s + 25 = 0$$

Using the Hurwitz stability criterion, determine the range of K for stability.

- Q.5 (a)** Draw a bode plot of the system. **07**


$$G(s) = \frac{10(s^2 + 0.4s + 1)}{s(s^2 + 0.8s + 9)}$$

- (b)** Draw the Nyquist plot of below given open-loop transfer function. **07**

$$G(s) = \frac{1}{s^2 + 0.8s + 1}$$

**OR**

- Q.5 (a)** Obtain the phase and gain margins of the system for the two cases where K = 10 and K = 100. **07**

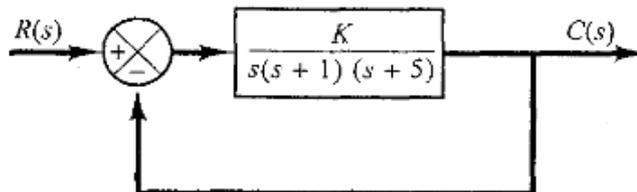

- (b)** Draw the polar plot and investigate the stability of a closed-loop system with the following open-loop transfer function: **07**

$$G(s)H(s) = \frac{K(s+3)}{s(s-1)} \quad (K > 1)$$

\*\*\*\*\*